

Operation instructions


USER'S MANUAL



Miniature ear hung walkie talkie

MINI Walkie Talkie instruction Menu

Instruction

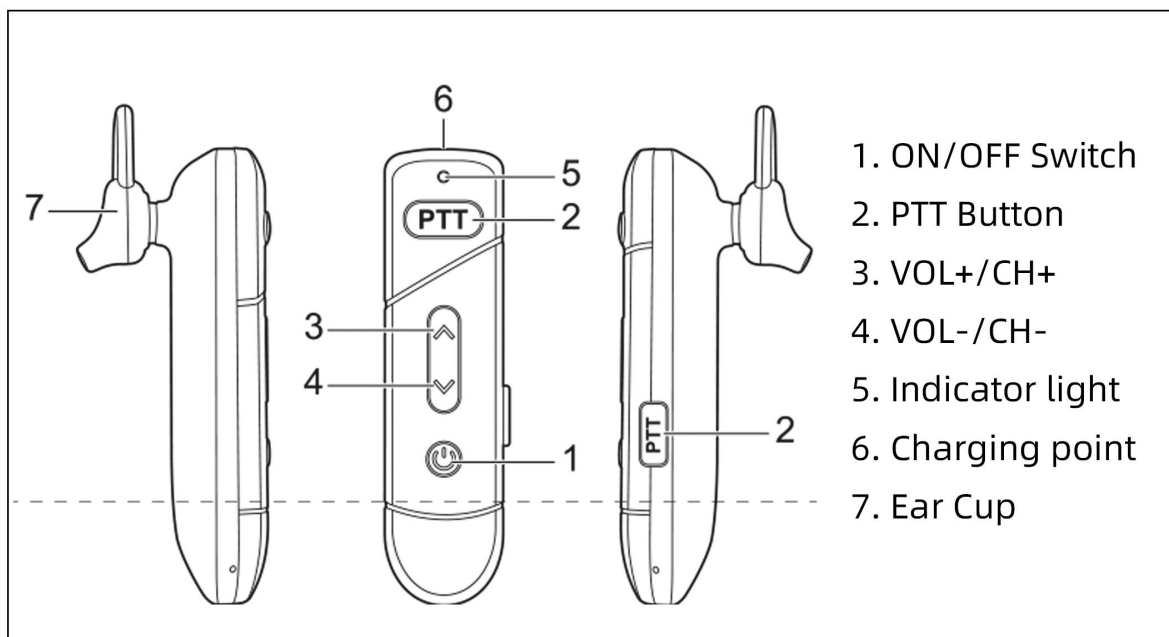

VOL+/CH+: When press this button in short duration: Increase volume

When press this button in long duration: Change Channel.

VOL-/CH-: When press this button in short duration: Decrease volume

When press this button in long duration: Change Channel.

ON/OFF Switch: When press this button in short duration: Remain current Channel.

When press this button in long duration: ON/OFF Function.

ON/OFF Function

1. ON Function: Press and hold ON/OFF Switch for 3s, to turn on the device. The indicator light will flash between red to green, that indicate the device had turn ON.

2.OFF Function: Press and hold ON/OFF Switch for 3s, to turn off the device. The indicator light will flash between red to green, that indicate the device had turn OFF.

Volume Function

VOL+: When press this button in short duration: Increase volume.

VOL-:When press this button in short duration: Decrease volume

Channel Function

When voice guide function is active, all the channel will be informed through voice guide.

CH+: When press this button in long duration: Change Channel. (From Channel 1 to Channel 16)

CH-: When press this button in long duration: Change Channel. (From Channel 16 to Channel 1)

PTT-Function

In order both devices to communicate, they must be in the same channel Press PTT to send message, indicator light will turn red. The device will be in receiving mode in all time except PTT button has pressed, the indicator will turn green.

Voice guide Function

The device had included voice guide system to assist you to operate this device in dark environment. There are two way to access voice guide. Firstly, use the computer program to active voice guide system Secondly. select channel to channel 15, press and hold Vol+ with ON/OFF Switch to access voice guide function.(From "Chinese", "English" , "Switch off Voice guide system")

Low Power warning

When battery is low power, Chinese voice guide system will indicate "请换电池" in every 30s.

English voice guide system will indicate "Please change battery "in every 30s. If voice guide is off, the device indicator light will flash red and generate "Di" " Di" , "Di" sound to indicate low power.

LOCK & Unlock mode

Press [VOL+/CH+] & [VOL-/CH-] to lock and unlock the device also the device will generate a "di" sound for lock and "di", "di" to unlock.

TOT Function

The communicate time frames between two devices can be program through computer. The time can set at 15s, 30s ,45s.....300s 15s between each choice. When the user communicate over this time, will be stop and indicate warning to the user.

The device will be back to normal after the PTT button is release,

QT/DQT

This device has 50 sets of QT also 60.0~260Hz non-standard QT.

The device has 105 set DaT also D000~D777 non-standard DQT (through computer programing to set up).

Some channel may set in QT/DQT signal, the user can choice to neglect third party call. This device neglect signal that are different QT/DQT from this device. Also, only at the same QT/DQT can communicate each other. QT/DQT does not encrypt message.

Encrypt Function

This device has encrypted function, that can protect frequency, qt data and your information. (through computer programing to set up).

VOX Function

This device has VOX function which the device will active PTT function when voice is detected. (All these functions set up through computer programing).

VOX function has two sub function:

VOX sensitive level. (From lvl1 to lvl9)

VOX detect delay time (From 0.5/1/1.5/2/2.5/3s)

BCL Function

BCL function can set up through computer programming.

When BCL is active, the device can prevent interrupt signal from other station in the same channel. During carrier frequency, the device will receive correct BCL frequency.

Such as, when select QT/DQT, channel frequency will not receive carrier frequency and CTCSS/DCS BCL. When select Busy channel and press PTI button, the device will generate warning sound if the channel is active. Release the PTT to stop the warning sound.

Hopping function

This device has hopping function, that can encrypt information from CTCSS, DCS. (through computer programming to set up)

Warranty Card

Thank you for purchasing our walkie talkies. Our company's series walkie talkies pass all strict quality control and safety trials.
Our company provides one-year warranty services.

Name:

Contact Number:

Address:

Postcode:

Product model:

Serial Number:

Purchase Date:

Invoice ID:

Distributor Company's Name(Stamp):