

operation instructions


USER'S MANUAL



Miniature ear hung walkie talkie

A08 MINIWalkie Talkie Instruction Menu

Instruction

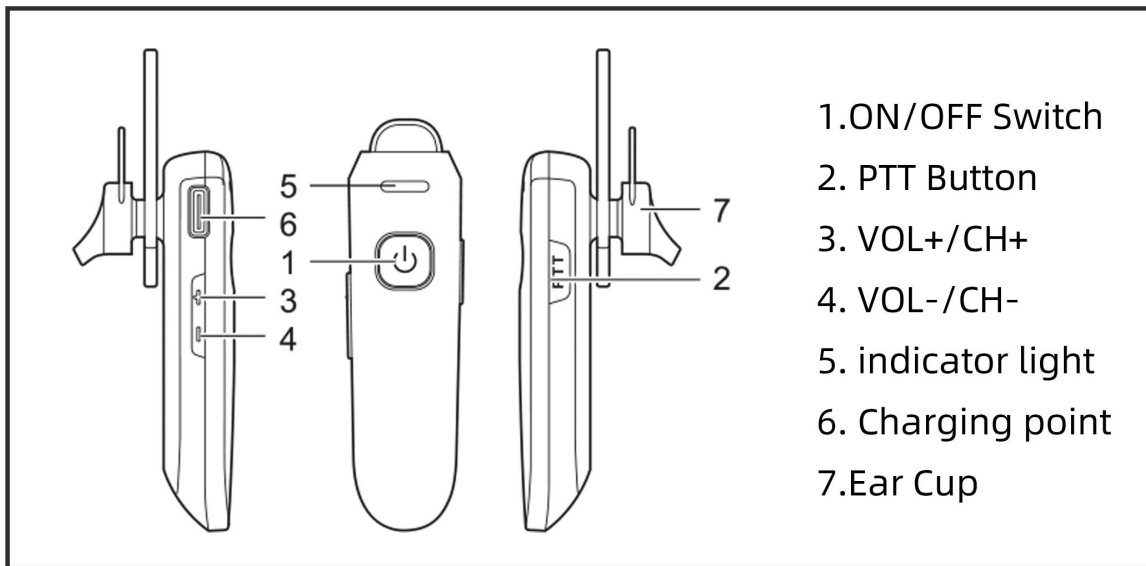

VOL+/CH+: When press this button in short duration: Increase volume.
When press this button in long duration: Change Channel.
VOL-/CH-:When press this button in short duration: Decrease volume.
When press this button in long duration: Change Channel.
ON/OFF Switch: When press this button in short duration:
Remain current Channel.
When press this button in long duration: ON/OFF Function.

ON/OFF Function

1. ON Function: Press and hold ON/OFF Switch for 3s, to turn on the device
The indicator light will flash between red to green, that indicate the device
had turn ON.

2.OFF Function: Press and hold ON/OFF Switch for 3s, to turn off the device.
The indicator light will flash between red to green, that indicate the device had turn OFF.

Volume Function

VOL+: When press this button in short duration: increase volume.
VOL-:When press this button in short duration: Decrease volume
When voice guide function is active,
all the channel will be informed through voice guide.
CH+: When press this button in long duration: Change Channel.
(From Channel 1 to Channel 16)
CH-:When press this button in long duration: Change Channel.
(From Channel 16 to Channel 1)

PTT Function

In order both devices to communicate, they must be in the same channel
Press PTT to send message, indicator light will turn red. The device will be in receiving mode in all time except PTT button has pressed, the indicator will turn green.

Voice guide Function

The device had included voice guide system to assist you to operate this device in dark environment. There are two way to access voice guide.
Firstly, use the computer program to active voice guide system.
Secondly, select channel to channel 15, press and hold Vol+ with ON/OFF Switch to access voice guide function. (From "Chinese", "English", "Switch off Voice guide system")

Low Power warning

When battery is low power, Chinese voice guide system will indicate “请换电池” in every 30s.

English voice guide system will indicate "Please change battery" in every 30s. If voice guide is off, the device indicator light will flash red and generate "Di", "Di", "Di" sound to indicate low power.

LOCK & Unlock mode

Press [VOL+/CH+] & [VOL-/CH-] to lock and unlock the device. Also, the device will generate a "di" sound for lock and "di", "di" to unlock.

TOT Function

The communication time frames between two devices can be programmed through a computer. The time can be set at 15s, 30s, 45s, ..., 300s. 15s between each choice. When the user communicates over this time, it will stop and indicate a warning to the user.

The device will be back to normal after the PTT button is released.

QT/DQT

This device has 50 sets of QT, also 60.0~260Hz non-standard QT.

The device has 105 sets of DQT, also D000~D777 non-standard DQT (through computer programming to set up).

Some channels may set in QT/DQT signal, the user can choose to neglect third-party calls. This device neglects signals that are different from QT/DQT of this device. Also, only at the same QT/DQT can they communicate with each other. QT/DQT does not encrypt messages.

Encrypt Function

This device has an encrypted function that can protect frequency, QT data, and your information. (through computer programming to set up).

VOX Function

This device has a VOX function which the device will activate PTT function when voice is detected. (All these functions set up through computer programming)

VOX function has two sub-functions:

VOX sensitive level. (From lvl1 to lvl9).

VOX detect delay time (From 0.5/1/1.5/2/2.5/3s)

BCL Function

BCL function can set up through computer programming. When BCL is active, the device can prevent interrupt signal from other station in the same channel. During carrier frequency, the device will receive correct BCL frequency. Such as, when select QT/DQT, channel frequency will not receive carrier frequency and CTCSS/DCS BCL. when select Busy channel and press PTT button, the device will generate warning sound if the channel is active. Release the PTT to stop the warning sound.

Hopping function

This device has hopping function, that can encrypt information from CTCSS DSC. (through computer programming to set up).

Warranty Card

Thank you for purchasing our walkie talkies. Our company's series walkie talkies pass all strict quality control and safety trials. Our company provide one-year warranty services.

Name: _____	Contact Number: _____
Address: _____	Postcode: _____
Product model: _____	Serial Number: _____
Purchase Date: _____	Invoice ID: _____
Distributor Company's Name(Stamp): _____	